

HSF



ROHS




SPECIFICATIONS:

Current Rating:	0.75Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65° C to +125° C
Contact Material:	Brass
Insulator Material:	PA6T, UL94V-0, Color:Black


Ordering Code:

PHBM02 - X - X - D - A - D - W - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No:
② No. of Contacts:
02 To 100
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Connector Type:
D: Dual
⑤ Pin Length:
A:0180=1.80mm
D:0020=0.20mm
W:0520=5.20mm
Please mark the desired length
in the A/D/W
⑥ Insulator Material:
B:PA6T
C:LCP
E:PA9T
⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
⑧ Plastic High:
H1:1.0mm
H2:1.5mm
⑨ With locating pegs option
A:Type A without pegs
B:Type B with pegs

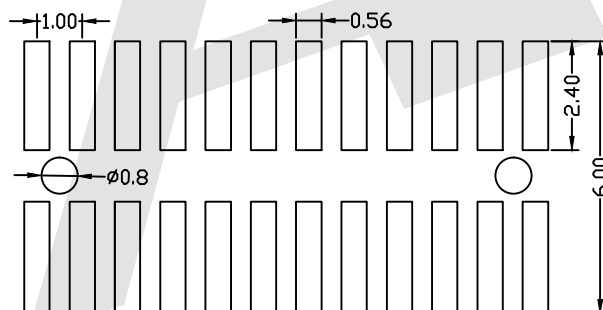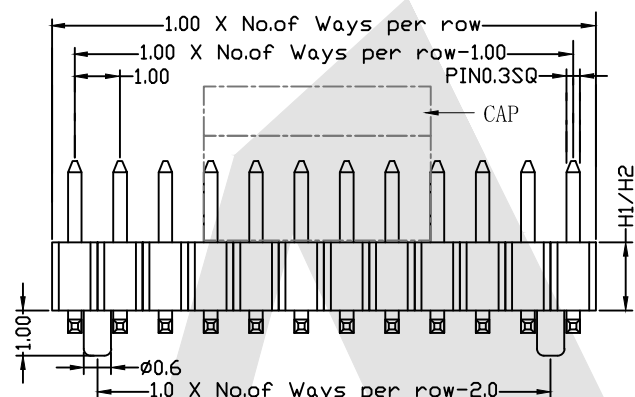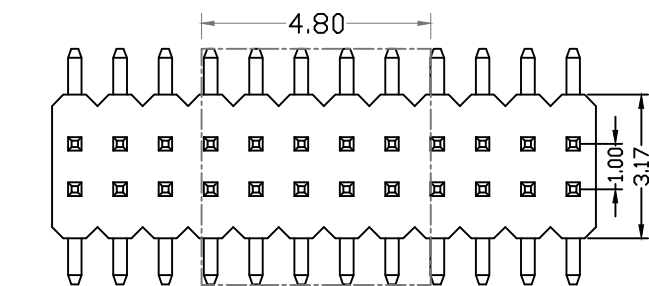

P. C. B LAYOUT

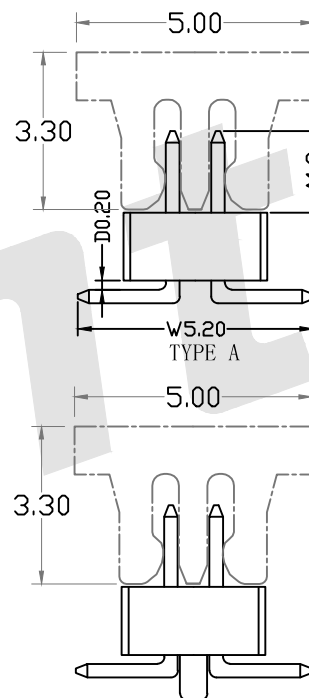

TYPE B

Standard IE P/N :

PHBM02-10-G0-D-0180-0020-0520-B-B-H1-B

A	D	W	Unless Otherwise specified tolerance		Antenk® ANTENK ELECTRONICS CO.,LTD Http://www.antenk.com E-mail:sales@antenk.com
1.8	0.2	5.2	X. ±0.35	X.XX: ±0.20	
Optional			X.X: ±0.25	X.XXX: ±0.15	
			SCALE: As Shown	UNIT: mm	TITLE: 1.00mm Pin Header Dual Row SMT Type
			DRAW YG ZHONG	DATE 12/01/2015	
			CHECK BobYang	DATE 12/01/2015	
			3rd ANGLE PROJECTION		DRAWING NO: PHBM02-XXD-0180-0020-0520-XXXX
					PRODUCT NO: PHBM02-XXD-0180-0020-0520-XXXX

Increase packing method and material

2016/10/25

REV

DESCRIPTION

DATE