

HSF



1.27mm Pin Header Dual Row SMT Type(W=3.0,H=1.6,2.0,2.5)




SPECIFICATION

Current Rating:	1Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T,UL 94V-0 Black


Ordering Code:

PHCM10 - X - X - D - A-D-W - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


- ① Series No:
② No. of Contacts
02 To 100
③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
④ Connector Type
D: Dual
⑤ Pin Length:
A: 0300=3.00mm
D: 0020=0.20mm
W: 0550=5.50mm
Please mark the desired length
in the A/D/W
⑥ Insulator Material
B: PA6T
C: LCP
E: PA9T
⑦ Packing
A: Tray B: Bag
T: Tube U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
⑧ Plastic High
H1: 1.6mm H2: 2.0mm
H3: 2.5mm
⑨ With locating pegs option
A: Type A without pegs
B: Type B with pegs

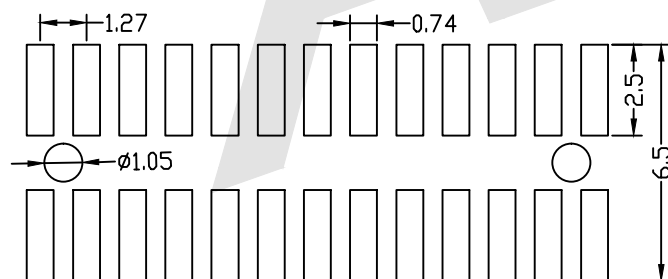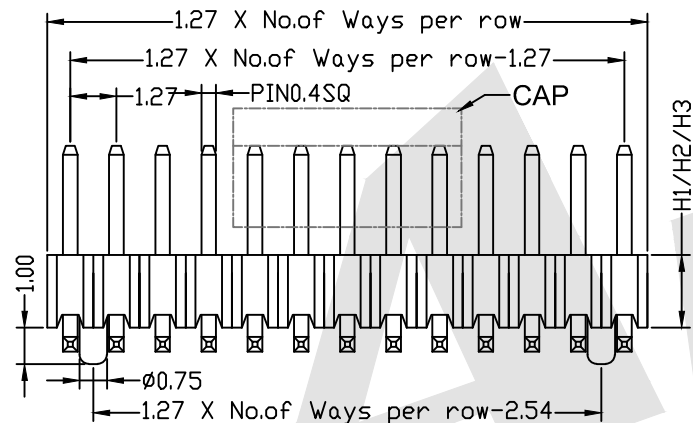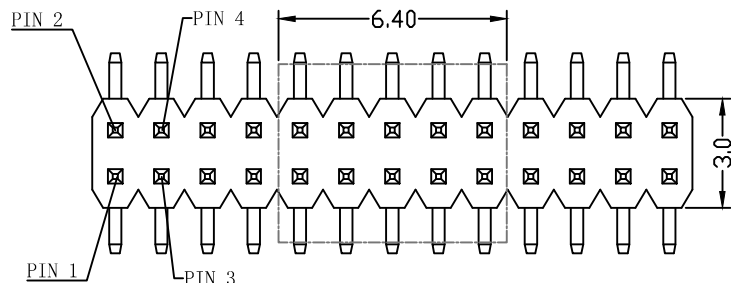

PCB LAYOUT

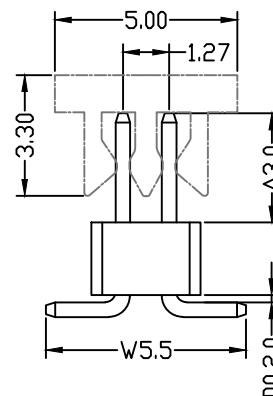

TYPE A

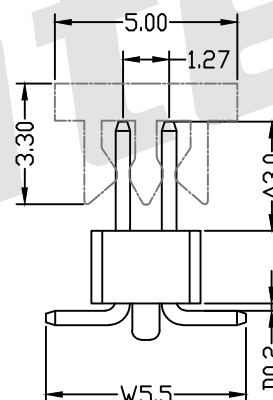

TYPE B

Standard IE P/N :

PHCM10-10 - G0 -D - 0300-0020-0550 - B - B - H2 - A

A	D	W	Unless Otherwise specified tolerance
3.0	0.2	5.5	X. XX: ±0.20 X. X: ±0.25 X. XXX: ±0.15

Optional	SCALE: As Shown	UNIT: mm
	DRAW YG ZHONG	DATE 12/11/2015
	CHECK BobYang	DATE 12/11/2015



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
1.27mm Pin Header Dual Row SMT Type

DRAWING NO: PHCM10-XXD-0300-0020-0550-XXXX

PRODUCT NO: PHCM10-XXD-0300-0020-0550-XXXX

Increase packing method and material

2016/10/25

DATE



3rd ANGLE PROJECTION

REV DESCRIPTION